


2020

QCDPIE-010

6.2

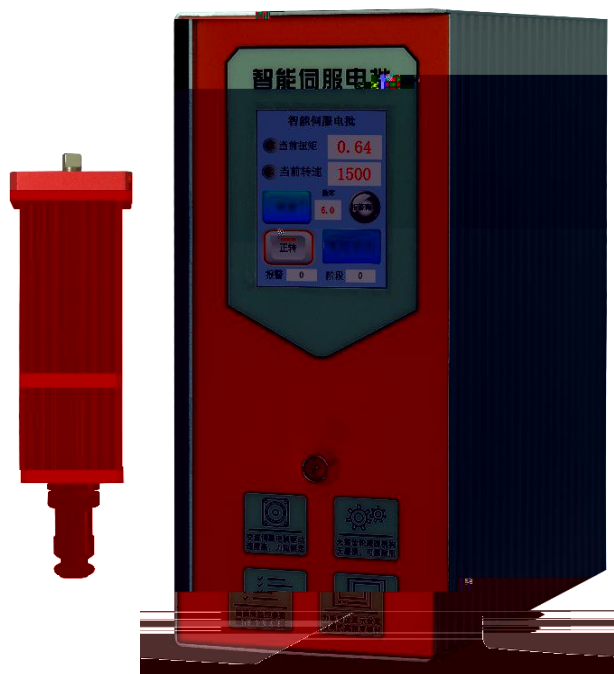

山

10

山


0

1

2

3

4

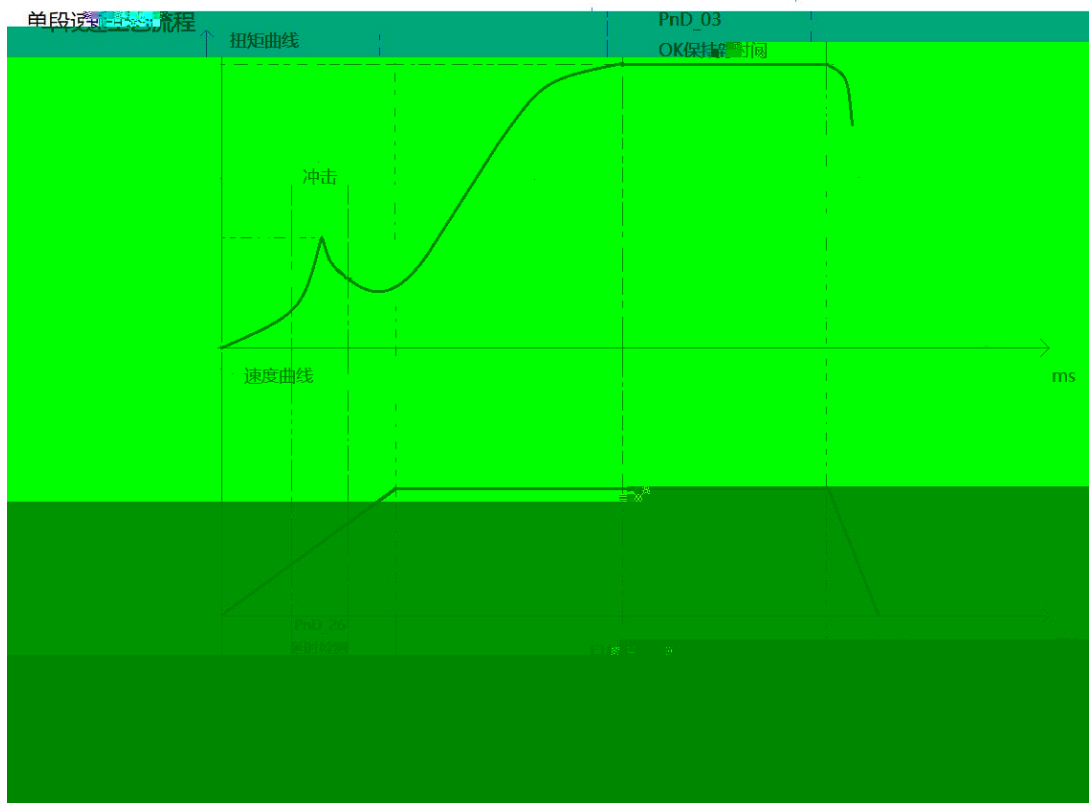

单段速

正转转速

1000

反转转速

200

正转转矩

0.32

反转转矩

0.32

正转加速度

500.0

反转加速度

500.0

下一页


返回


延迟检测

0.200

上一页

返回

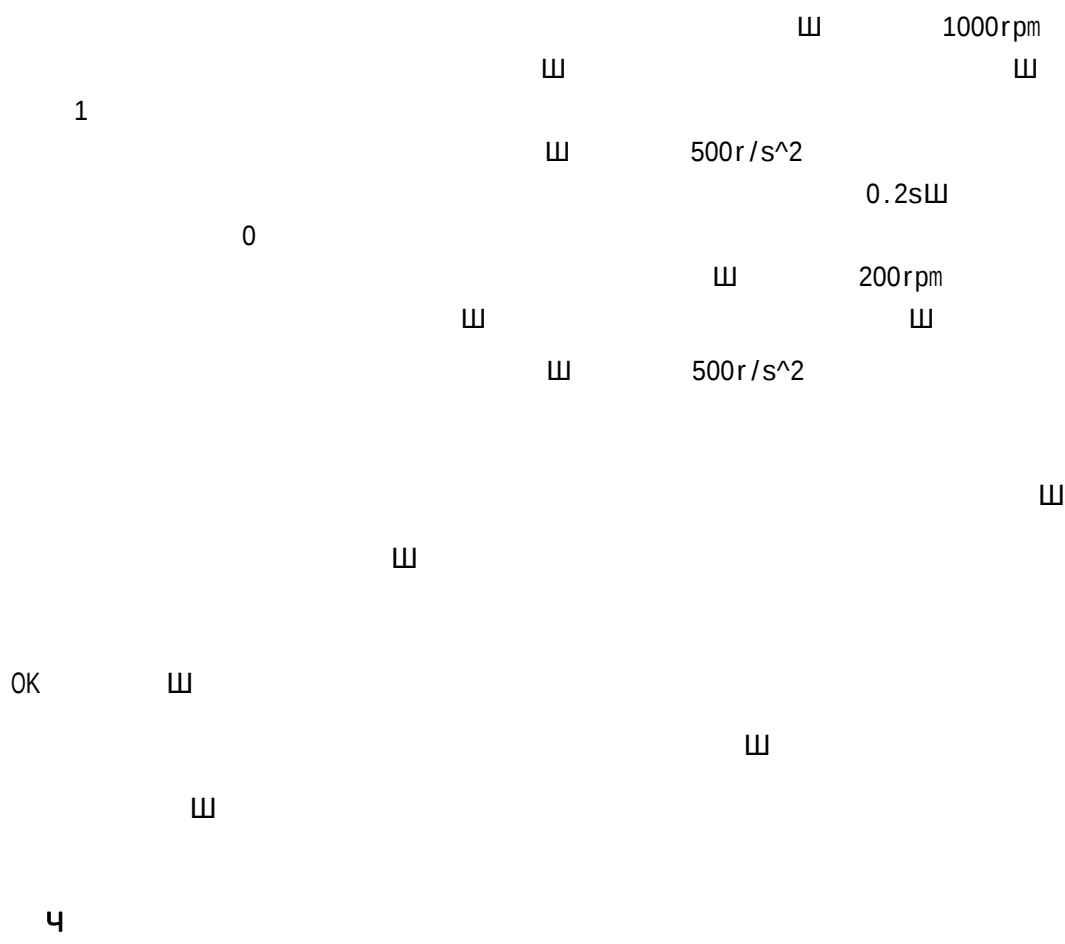

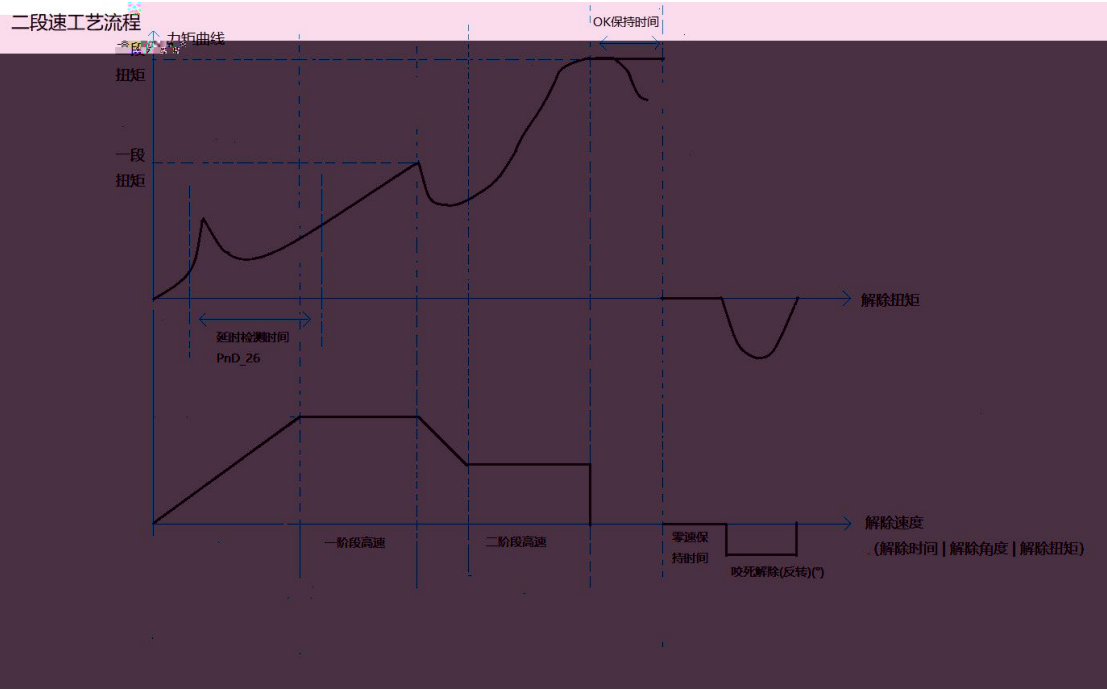

山

山

二段速设置-I		二段速设置-II	
一段扭矩	二段扭矩	一段加速度	二段加速度
0.20	0.32	500.0	500.0
一段扭矩上限	二段扭矩上限	一段时间上限	二段时间上限
1.00	1.00	32.000	32.000
一段转速	二段转速		
1500	800		
下一页	返回	上一页	返回

山

70%山

山

山

:

山

1500rpm

山

500r/s^2

山

10s

ω 1
 ω ω
 ω_p 800rpm

咬死解除	
零速保持	解除速度
0.000	200
解除扭矩	解除角度
0.32	36 X 10
解除时间	解除角度
32.000	3600 X 0.0
返回	

0山

, 200rpm

山


0

山

山360 α

山

32s山

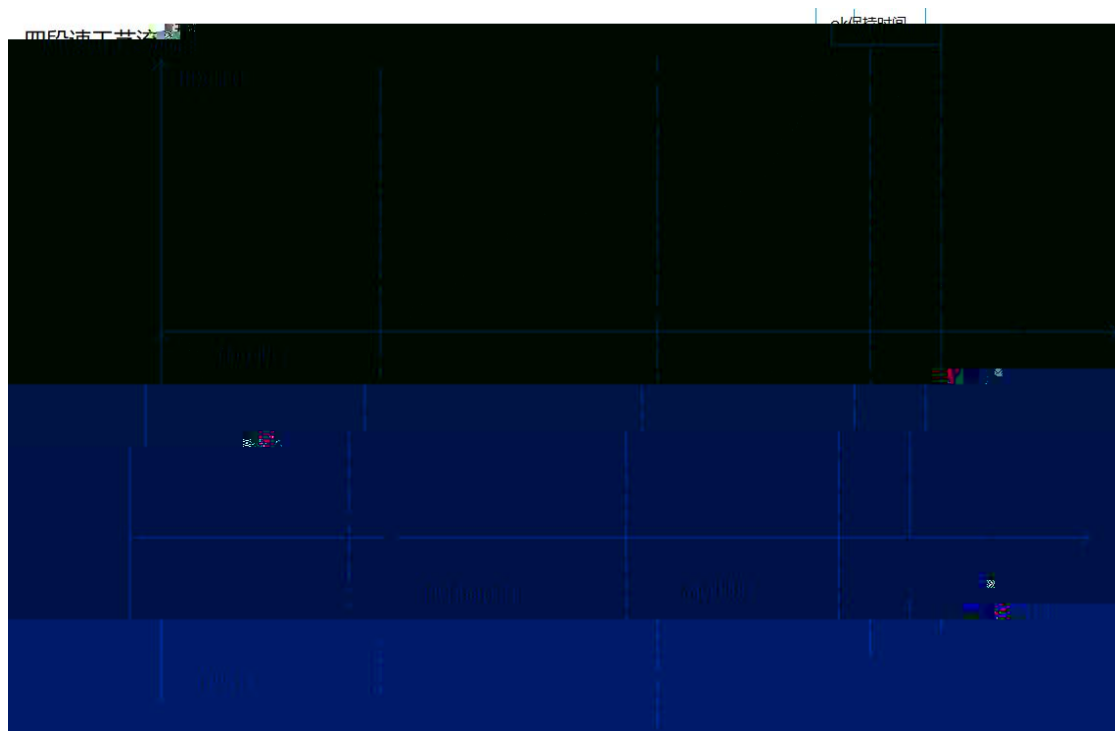

OP

山

3山

4

4


山

山

山

4

山

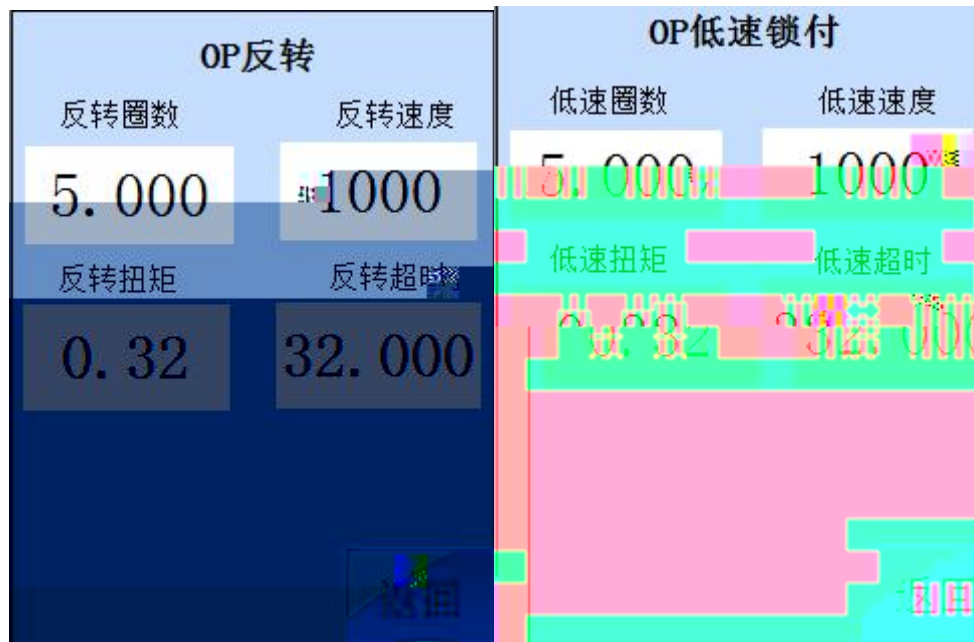

5 山

0.32N | M
1000rpm

32s

5

0.32N | M

1000rpm

32s

4

2

1.

2.

3.

5

1 4

2 4

7

1 4

2 4

9

UVW

1 4

2 4

3 4

11

DC

220V

220V

12

VDC

220V

1 4

220V

2 4

15

20

1 4

2 4

3 4

22

1 4


2 4

3 4

32

IIC

IIC

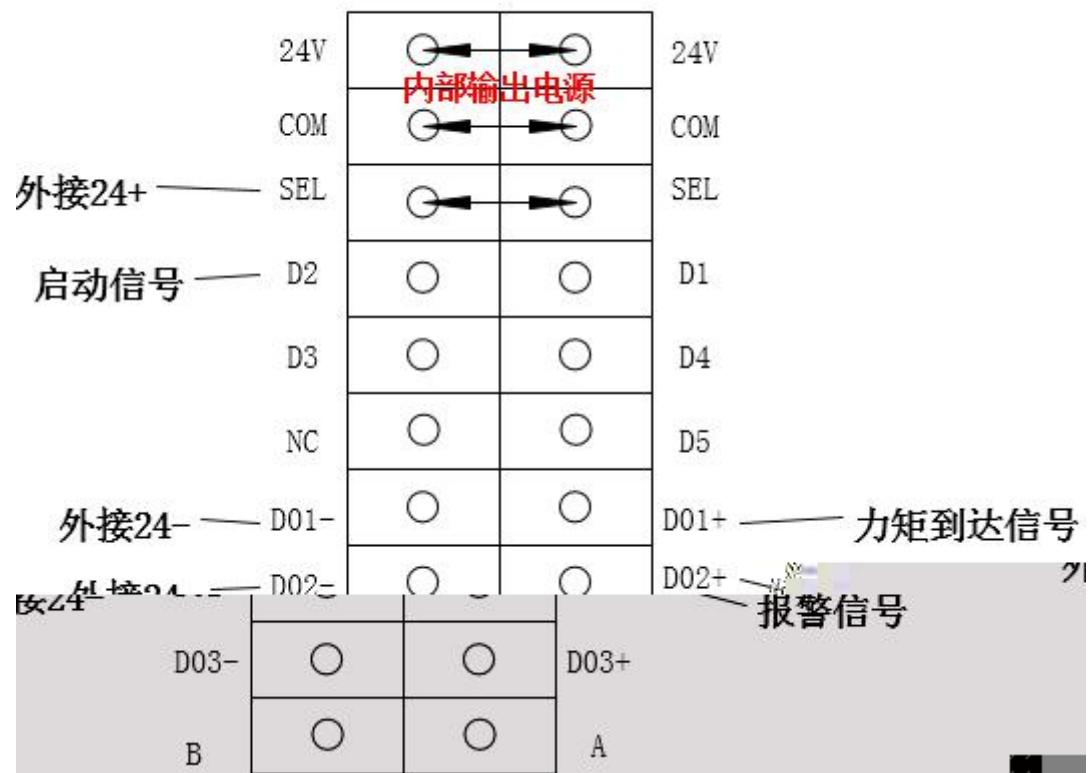

L1		/
L2		220V 50/60HZ
U		UVW
V		
W		
ENCODER		
24V		24V
COM		
SEL		
NC	-	-
D11-D15		
D01- 4D01+ D03- 4D03+		
A 4 B	485+ 4 485-	485

1. 24V+ SEL DI2Ш
2. OK DO+,DO- -24V SEL +24VШ

Ш





Ч

100W			1 Ш
200W			0 Ш
400W			


Ч

1. MODBUS RTU Ш
2. OK,NG 01H Ч 05HШ
3. 03H Ч 06H
4. Rs485 115200Ш
5. Rs485 ModBus RTU, 8 1 , Ш
6. Rs485 ModBus Ш 1~127

4

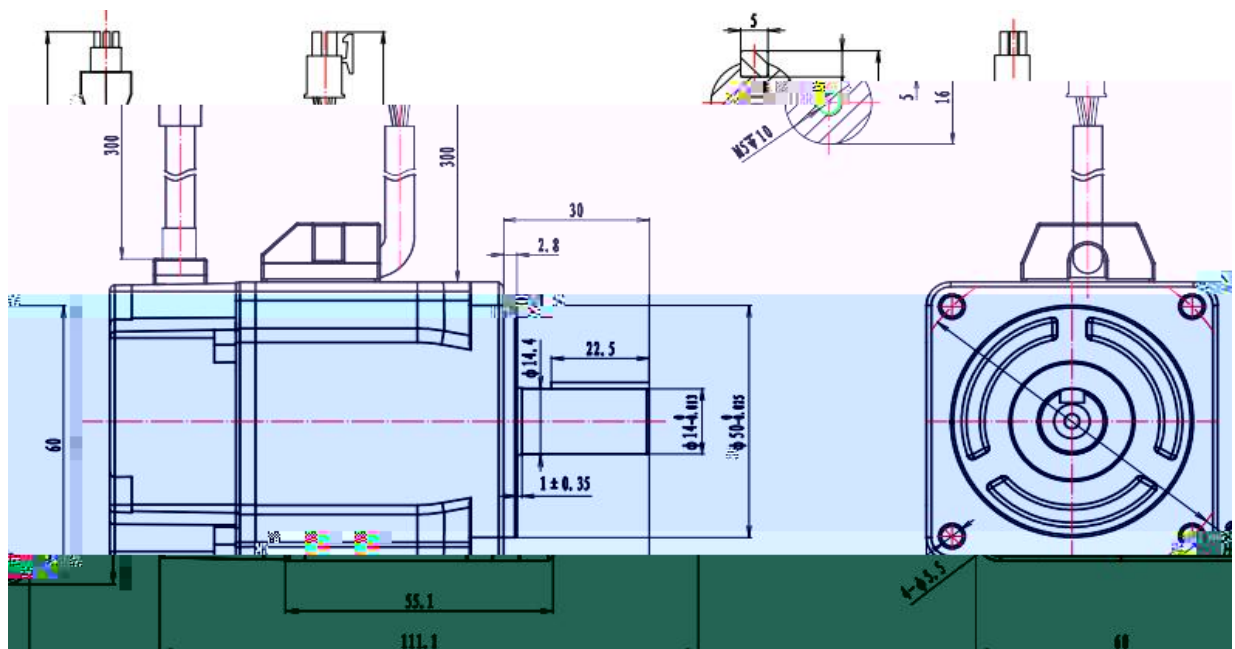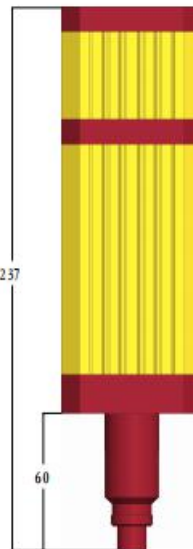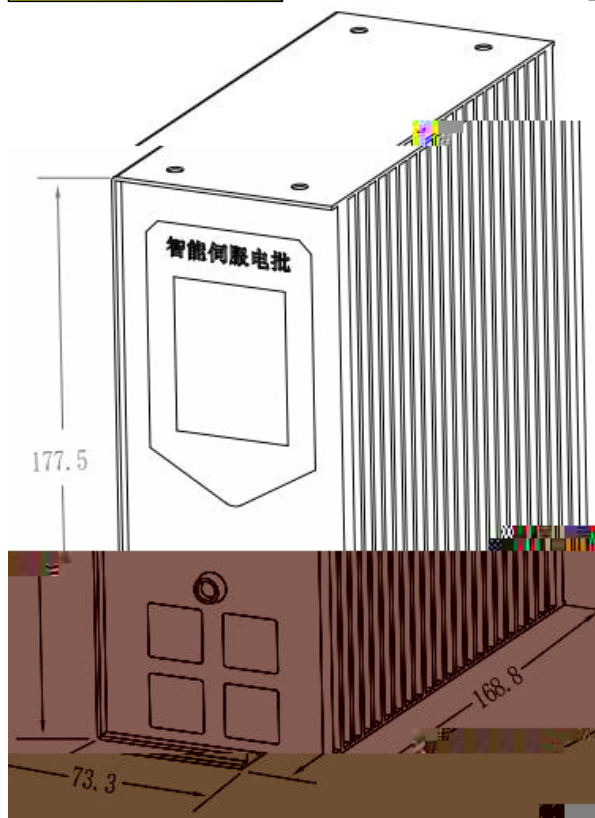

400W

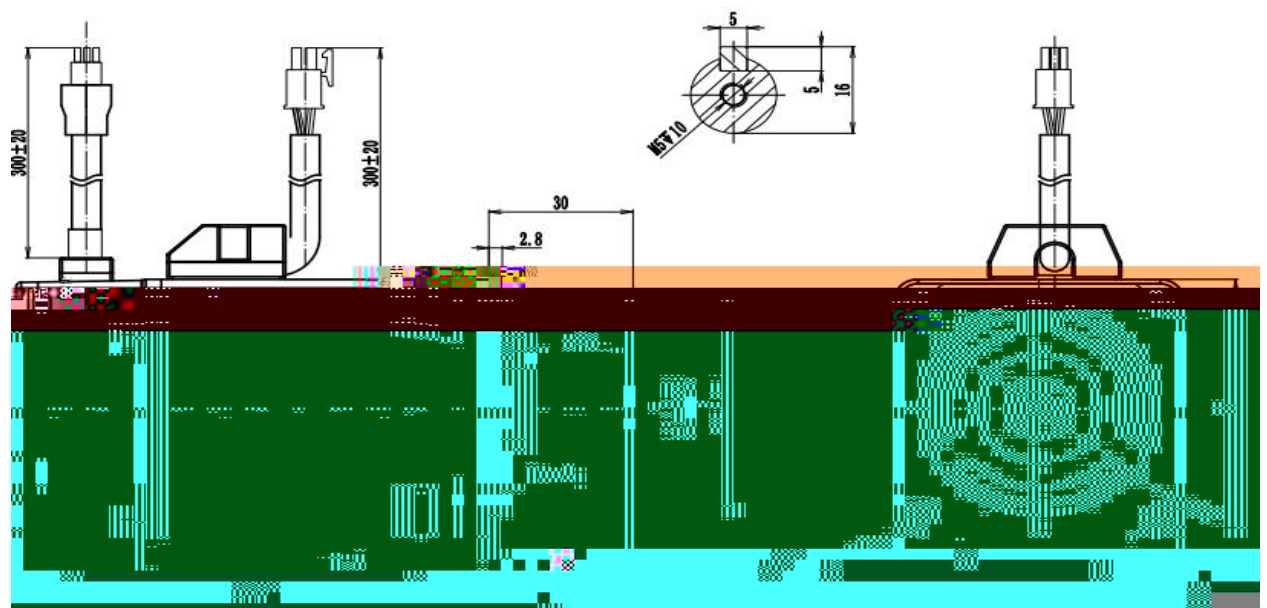

C
C
C
C

Ш

Ш

Ш

Ш

